


MarineBoost^{GDW-4}

Frequencies (Mhz): 900 / 1800 / 2100

Ports: 4

Series: 1002

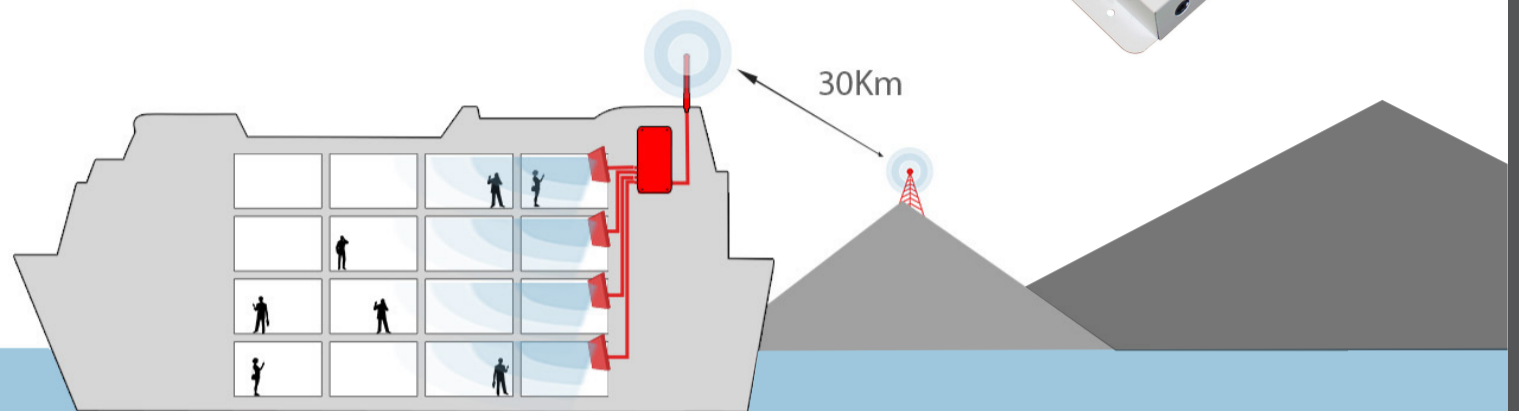

How it works

The external omni-directional antenna is mounted high up on the ship. This receives the signal from all operators 360deg around the ship. It will receive the signal from several cell towers on the coastline.

When your ship passes within ~30Km of any mobile tower, the MarineBoost will receive this signal and amplify it into your ship.


A 15 meter cable then sends the signal to the repeater which is located inside the ship. (This length can be extended using a pre-amplifier)

Coverage

Four indoor panel antennas can be connected to the repeater to provide coverage in four areas inside the ship. Each antenna provides 1000m² of coverage (tested in open space). This equates to about 2-3 rooms inside your ship.

Therefore, four antennas will provide 1000m² X 4 = 4000m², or about 15 room coverage.

The repeater kit includes



MarineBoost
4 port



Indoor
antennas X4



Outdoor
Antenna



Power
Supply



15m SD240
Cable X4



15m SD400
Cable

Do not use StellaDoradus repeaters with non Stelladoradus equipment.

Stelladoradus repeaters operate silently on the operators network. By using our equipment with competitors equipment you break this control system and could potentially harm the operators network. Doing so will void warranty.

MarineBoost_{GDW-4}



• Model number:	SD-RP1002-GDW-O-4
• Frequency(Mhz):	900/ 1800/ 2100
• Networks:	GSM/ 3G/ 4G

Frequency bands(Mhz):	(880_960) + (1710_1880) + (1920_2170)
Coverage:	1000 X 4 m ² (open space)
Number of People:	unlimited
Gain:	Uplink Gp > 50dB Downlink Gp> 60dB
Pass band ripple:	< 4dB
I/O impedance:	50 ohm/SMA female connector
Max uplink/downlink signal strength:	17dBm / 10dBm
Ambient Temperature:	-30°C to +70°C
Power supply input:	110 - 240V AC
Power supply output:	12v DC
Oscillation Control	Automatic
Level Control:	Automatic*
Uplink Switch Off	Yes**
AGC Range	30db
Surge protection	SMA connectors DC grounded, 12V DC port MOV protected

Antenna Specifications

Indoor antenna

outdoor omni antenna

Nominal Gain	6.4dBi / 9.4dBi	4.5dBi / 5dBi
3dB beam Pattern	60° x 60°	38° / 35° omni
Bandwidth	790-960MHz + 1710-2700MHz	790-960MHz + 1710-2700MHz
VSWR	<1.4	<2
Front to Back Ratio	> 20dB	> 20dB
Polarization	Vertical	Vertical
Power Rating	50W	100W
Impedance	50-OHM	50-OHM
Termination	SMA male	N-Female
Cross Pol. Discrimination	-20dB	-20dB
Dimensions	210 x 180 x 43mm	365 x 33mm
Weight	0.68kg	0.39kg
Rated wind velocity	126km/hr	216Km/h
Working temperature	-40°C to +65°C	-40°C to +65°C

Power Supply Specification

AC	100-240V	50-60Hz
DC input	12V	2.2A
Typical power usage	26W	

Mechanical Specification

Length	40cm
Width	19cm
Depth	3.5cm
Weight	1.2kg
Mounting	6 x 5mm holes for mounting

* Automatically adjusts during installation. Thereafter, automatically adjusts for seasonal variation in pathloss between Basestation and Outdoor Antenna.

** The uplink amplifiers switch off when the repeater is not in use, thus reducing the uplink noise to almost zero. When the repeater is in use (eg phone call being made), the uplink amplifier switches on for the duration of the call and a blue LED switches on indicating this is the case.

Note: Specifications subject to change without notice.